


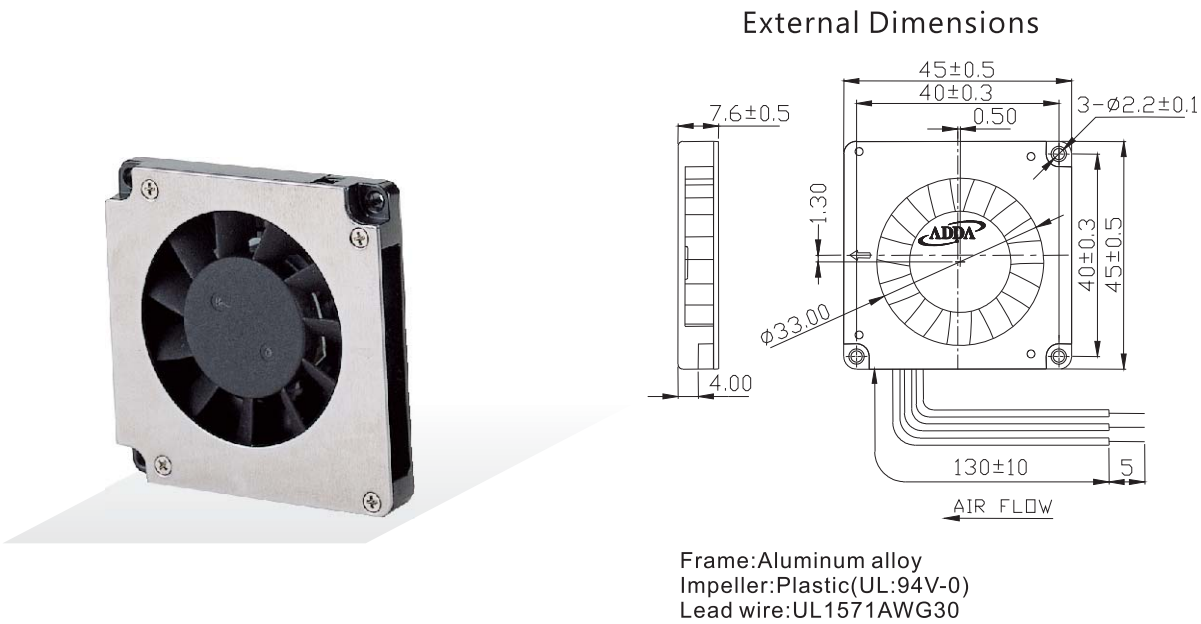

Specifications(Nominal)


Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
45x45x07	AB4505LB-QA0(S)	○●	5	0.07	0.35	4700	0.042	1.50	0.202	5.13	23.3	23.0
	AB4505MB-QA0(S)	○●	5	0.08	0.40	5500	0.048	1.70	0.289	7.33	27.9	
	AB4505HB-QA0(S)	○●	5	0.12	0.60	6200	0.059	2.10	0.391	9.93	31.2	
	AB4512LB-QA0(S)	○	12	0.04	0.48	4700	0.042	1.50	0.202	5.13	23.3	
	AB4512MB-QA0(S)	○	12	0.06	0.72	5500	0.048	1.70	0.289	7.33	27.9	
	AB4512HB-QA0(S)	○	12	0.07	0.84	6200	0.059	2.10	0.391	9.93	31.2	

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ○=Ball ※=Sleeve○=1B1S●=Hypro bearing

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
 (網頁上呈現產品軸承資訊均以參考為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

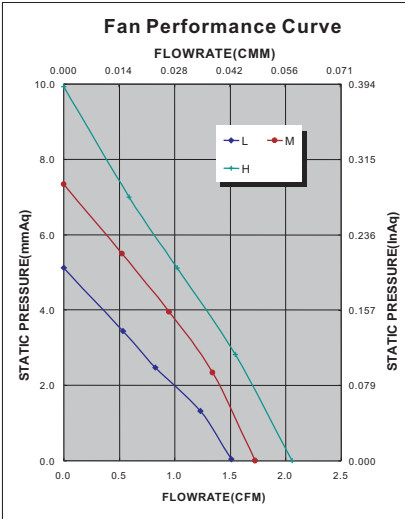

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

✓	✓		✓	✓