


AB7530 SERIES



External Dimensions

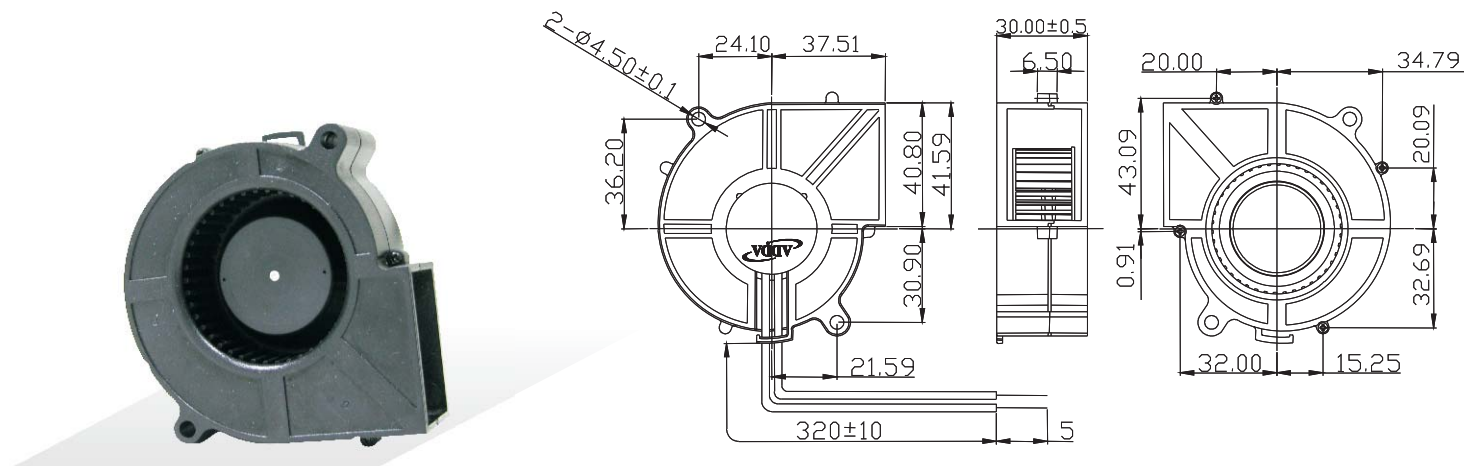

Frame:Plastic(UL:94V-0)
Impeller:Plastic(UL:94V-0)
Lead wire:UL1007AWG24

Specifications(Nominal)


*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)	Maximum Pressure (InAq) (mmAq)	*Noise Level (dB/A)	Weight (g)
75x75x30	AB7512DB-W01	◎ ●	12	0.10	1.16	2200	0.252 8.90	0.200 5.08	28.7	80.0
	AB7512LB-W01	◎ ●	12	0.18	2.16	2800	0.323 11.40	0.350 8.89	37.6	
	AB7512MB-W01	◎ ●	12	0.25	3.00	3400	0.391 13.80	0.560 14.22	41.7	
	AB7512HB-W01	◎ ●	12	0.32	3.84	3900	0.450 15.90	0.770 19.56	45.4	
	AB7512UB-W01	◎ ●	12	0.48	5.76	4500	0.524 18.50	1.020 25.91	49.1	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

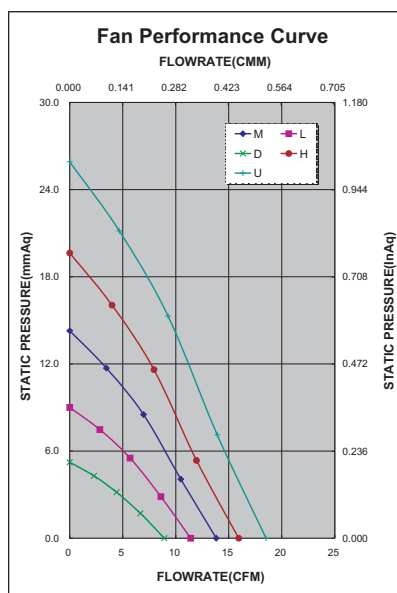

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							✓

*Safety approvals

UL	cUL	SP®	CE	CE
✓		✓	✓	✓