




AD12025 ES SERIES

Preliminary

External Dimensions

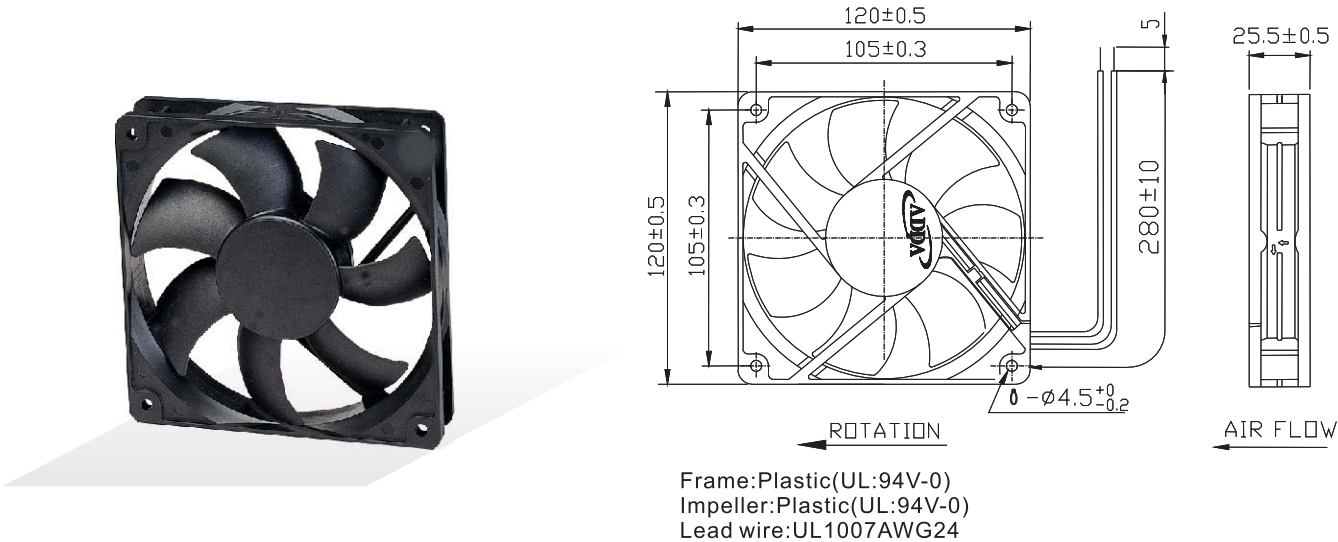

Specifications(Nominal)


*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM, CFM)		Maximum Pressure (InAq, mmAq)		*Noise Level (dB/A)	Weight (g)
120x120x25	AD12012DB57100	◎ ※ ●	12	0.06	0.72	1500	1.618	57.205	0.074	1.879	27.2	156.0
	AD12012LB57100	◎ ※ ●	12	0.09	1.08	1800	2.032	71.806	0.093	2.362	34.4	
	AD12012MB57100	◎ ※ ●	12	0.13	1.56	2050	2.293	81.054	0.113	2.870	38.0	
	AD12012HB57100	◎ ※ ●	12	0.21	2.52	2200	2.486	87.870	0.134	3.403	39.1	
	AD12012UB57100	◎ ※ ●	12	0.35	4.20	2500	2.800	98.965	0.174	4.419	43.3	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

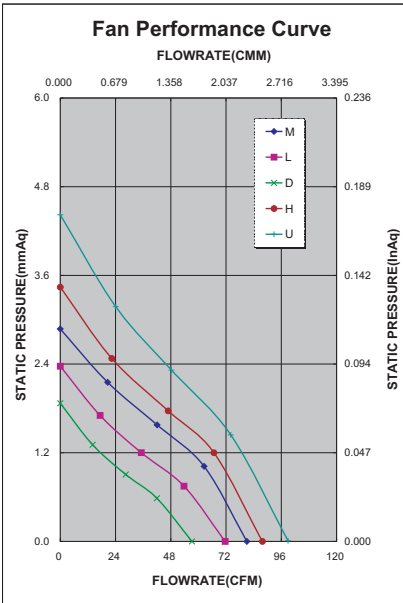

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓	✓	✓		✓	✓		✓

*Safety approvals

				✓