


AD8025GP SERIES

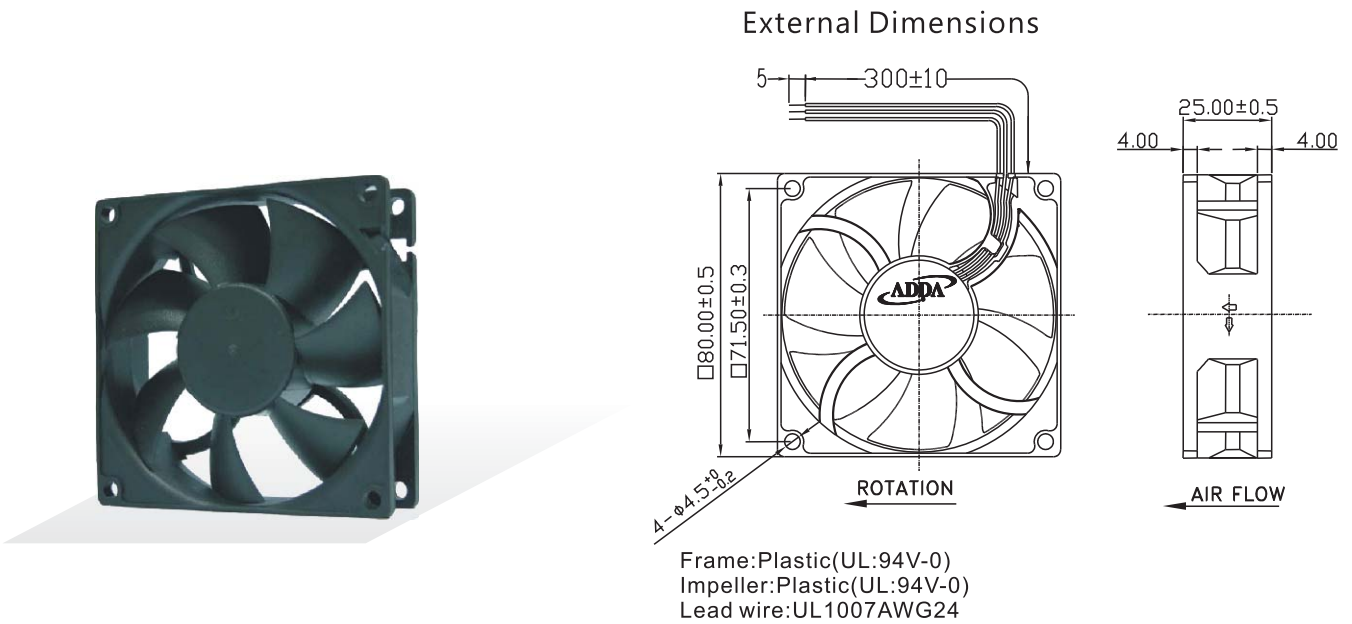


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ⊗=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
80x80x25	AD0812HB-A73GP	◎	12	0.17	2.04	3500	1.415	50.000	0.190	4.826	38.5	95.0
	AD0812UB-A73GP	◎	12	0.27	3.24	4000	1.584	56.000	0.250	6.350	43.5	
	AD0812XB-A73GP	◎	12	0.38	4.56	4500	1.896	67.000	0.300	7.620	46.0	
	AD0812VB-A73GP	◎	12	0.55	6.60	5000	2.037	72.000	0.360	9.144	49.0	
	AD0824HB-A73GP	◎	24	0.10	2.40	3500	1.415	50.000	0.190	4.826	38.5	
	AD0824UB-A73GP	◎	24	0.13	3.12	4000	1.584	56.000	0.250	6.350	43.5	
	AD0824XB-A73GP	◎	24	0.18	4.32	4500	1.896	67.000	0.300	7.620	46.0	
	AD0824VB-A73GP	◎	24	0.26	6.24	5000	2.037	72.000	0.360	9.144	49.0	
	AD0848HB-A73GP	◎	48	0.05	2.40	3500	1.415	50.000	0.190	4.826	38.5	
	AD0848UB-A73GP	◎	48	0.08	3.84	4000	1.584	56.000	0.250	6.350	43.5	
	AD0848XB-A73GP	◎	48	0.11	5.28	4500	1.896	67.000	0.300	7.620	46.0	
	AD0848VB-A73GP	◎	48	0.13	6.24	5000	2.037	72.000	0.360	9.144	49.0	

Specifications subject to change without notice.

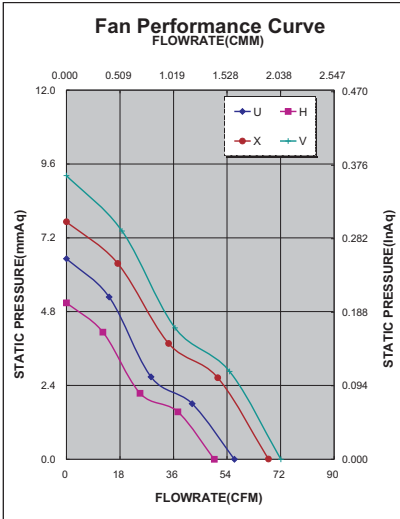

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓					✓		✓

*Safety approvals

				
				✓