




Ak17251 SERIES

External Dimensions

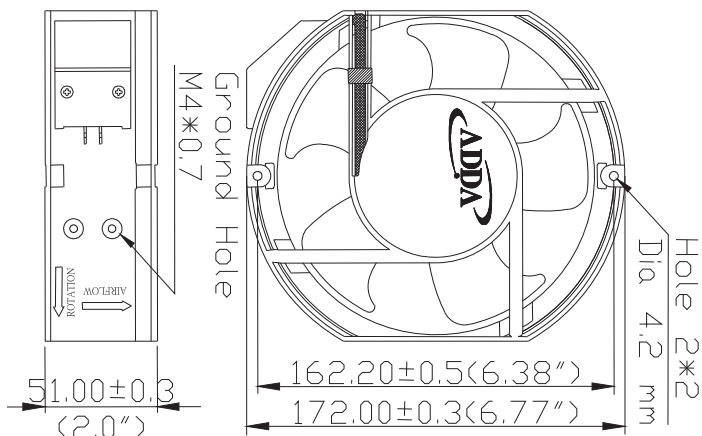

Frame: Aluminum Alloy
Impeller: Plastic (UL: 94V-0)
Motor Structure: Shaded Pole Induction Motor.
Motor Protection: Impedance Protect.
Lead wire: UL 1430 AWG22
OPERATING TEMP*: -10°C~70°C
*: -10°C~60°C for fans with sleeve/ball combination bearings.

Specifications(Nominal)


*: Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing


Frame size (mm)	Model No.	Bearing System Type	Volt. (VAC)	Freq. (Hz)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)	Maximum Pressure (InAq) (mmAq)	*Noise Level (dB/A)	Weight (g)	
172x150x51	AK1651HB	◎	115	50/60	0.55/0.46	62.10/51.80	2600/2700	4.867/5.348	172.0/189.0	0.433/0.408	10.998/10.363	55.5/57.7
	AK1652HB		230		0.27/0.23	59.80/50.60						
	AK1651MB	◎	115	50/60	0.33/0.31	36.80/34.50	2400/2300	4.528/3.962	160.0/140.0	0.340/0.180	8.636/4.572	53.0/50.3
	AK1652MB		230		0.17/0.17	36.80/36.80						

Specifications subject to change without notice.

50Hz

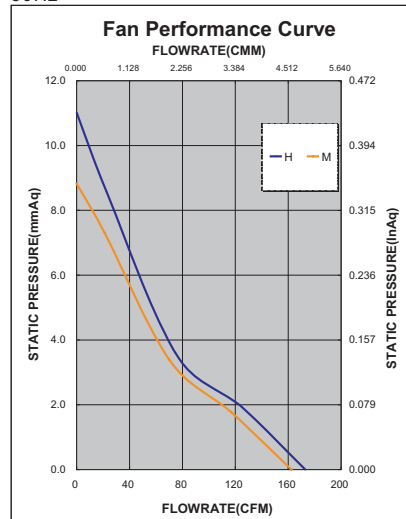

60Hz

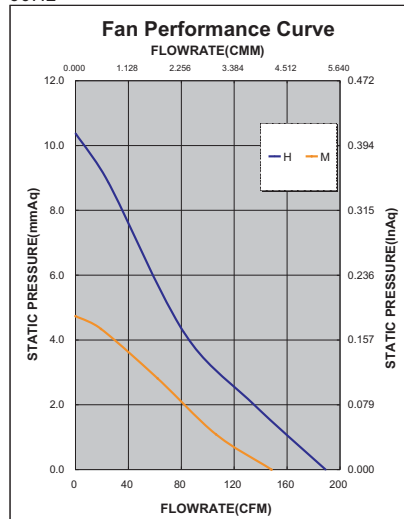

*Safety approvals

✓	✓		✓	✓