




AX25489 SERIES



External Dimensions


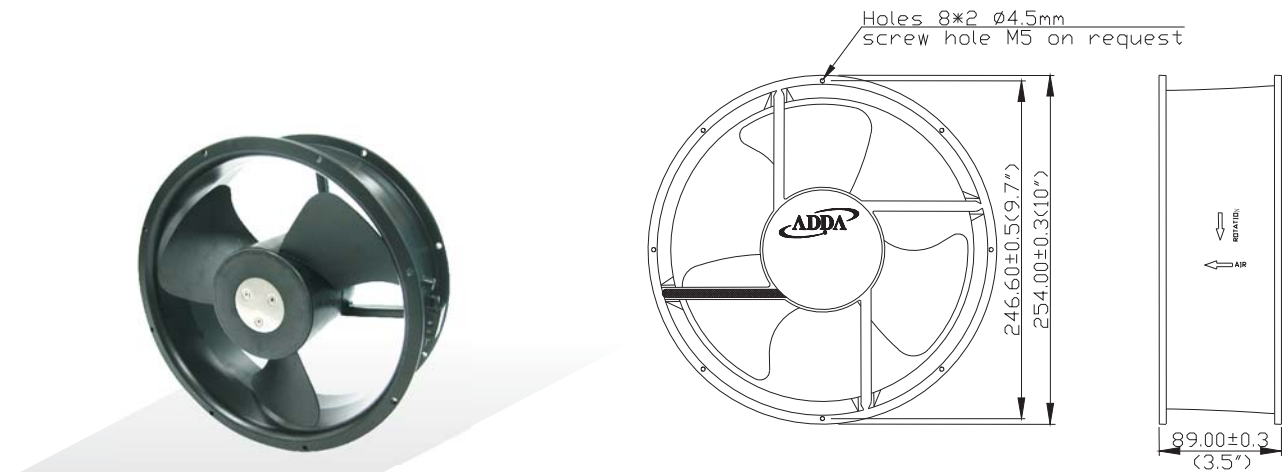


Frame:Aluminum Alloy
Impeller:Plastic(UL:94V-0)
Lead wire:AWG22 UI1015
Motor:Capacitor-Run Induction Motor
OPERATING TEMP*:-10C~70C
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing												
Frame size (mm)	Model No.	Bearing System Type	Volt./Freq. (VAC/Hz)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		*Noise Level (dB/A)	Weight (g)
254x89	AX25891HB-C	◎	115/50	0.68	78.40	2400	20.376	720.0	0.530	13.40	80.0	2150
			115/60	0.85	98.30	2500	21.225	750.0	0.450	11.84	88.0	
	AX25892HB-C	◎	230/50	0.35	79.60	2400	20.376	720.0	0.530	13.40	80.0	
			230/60	0.42	97.60	2500	21.225	750.0	0.450	11.84	88.0	
Specifications subject to change without notice.												

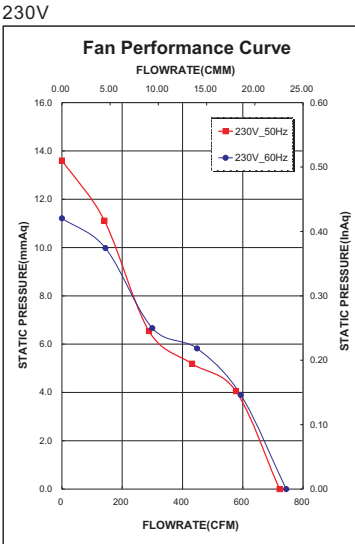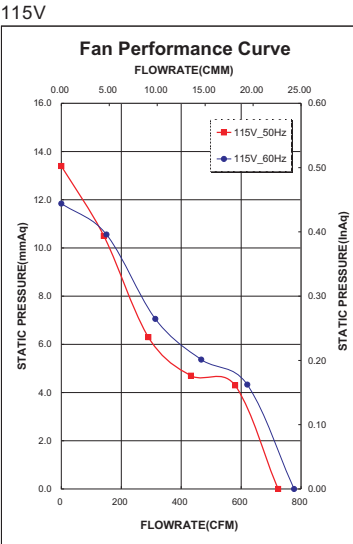

*Safety approvals

✓	✓			

			✓	✓